
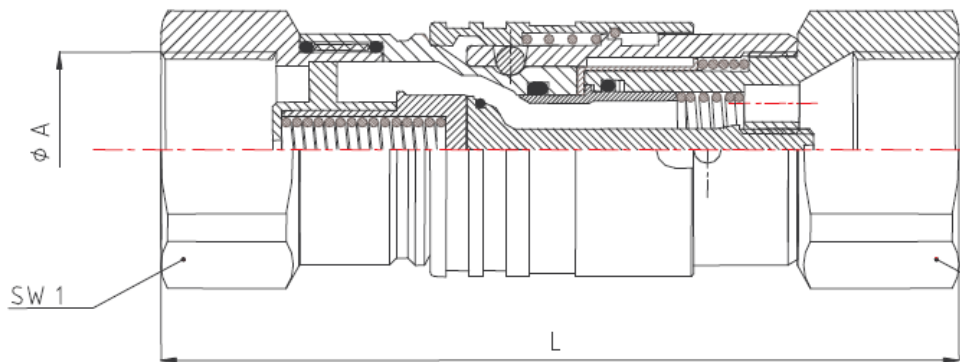


# Flat Face Couplings - ISO 16028 standard

## 316 Stainless steel

- No spillage during disconnection / No air inclusion during connection
- Application where fluid leaks aren't allowed for ecological or safety reasons
- Standard Threads: BSP/ other threads on request
- Viton Seals or else on request
- PTFE Antiextrusion BK rings
- Interchangeable with FASTER 2FF and STUCCHI FIRG
- Safety lock device

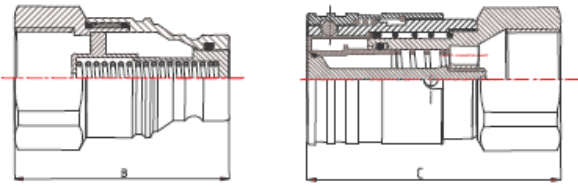

ØA-xx inch	SW 1 mm.	SW 2 mm.	L mm.	B mm.	C mm.	M Kg.	WP Bar
1/4"-06	22	22	86	48	48	0.25	300
3/8"-09	27	27	118	67	68	0.40	250
1/2"-13	32	32	125	68	74	0.65	250
3/4"-19	36	36	130	70	79	0.75	200
1" - 25	45	45	153	82	93	1,20	150
1" ¼-30	55	55	172.5	90	106	1.95	100
1"½ -40	65	65	173	112	132.5	4.50	90
2" - 50	75	75	242	124	157	8.50	60