

# Filters

## FT, FB, FI and FW Series



### FITOK Group

**FITOK GmbH (Headquarter)**  
Spredlinger Landstr. 115, 63069 Offenbach, Germany  
Tel.: +49 69 8900 4498  
Fax: +49 69 8900 4495

**FITOK INC**  
13000 Murphy Road, Suite 116, Stafford, TX 77477, USA  
Tel.: +1 281 888 0077  
Fax: +1 281 247 1806

**FITOK INCORPORATED**  
Yingtai long Industrial Park, Shenzhen, 518109, China  
Tel.: +86 755 2803 2500  
Fax: +86 755 2803 2619

info@fitokgroup.com  
www.fitokgroup.com

FI18040813

**FITOK**  
Valves and Fittings

[www.fitokgroup.com](http://www.fitokgroup.com)

## Filtration Definitions

- Sintered element: metal powder (alloys are available) is pressed in a die at sufficient pressure that the powder particles adhere at their contact points.
- Strainer element: the strainer is cup-shaped and includes an inner cup-shaped support structure having staggered perforations extending through the surfaces thereof, an outer cup-shaped strainer structure constructed of wire mesh is closely received over the support structure
- Element nominal pore size: the element nominal pore size is normally calculated from the pressure required to cause air to bubble from the largest pore in the filter element when submerged in a test liquid.

## Features

### Tee-type Filters

#### FT Series

- Filter element replaceable without removing body from system
- Union bonnet design
- Nominal pore sizes for sintered element: 0.5, 2, 7, 15, 40, 60 and 80 µm
- Nominal pore sizes for strainer element: 100, 150, 250 and 450 µm
- Maximum working pressure: 6000 psig (414 bar)
- Working temperature: -20°F to 900°F (-28°C to 482°C)
- Body materials: 316 SS, 316L SS, 304 SS, 304L SS, 904L SS, and Brass
- Variety of end connections available

### Bypass Filters

#### FB Series

- Bypass port at filter bottom for the ease of sampling or purging
- Union bonnet design
- Nominal pore sizes for sintered element: 0.5, 2, 7, 15, 40, 60 and 80 µm
- Nominal pore sizes for strainer element: 100, 150, 250 and 450 µm
- Maximum working pressure: 6000 psig (414 bar)
- Working temperature: -20°F to 900°F (-28°C to 482°C)
- Body materials: 316 SS, 316L SS, 304 SS, 304L SS, 904L SS, and Brass
- Variety of end connections available

### In-line Filters

#### FI Series


- Compact and space-saving design
- Nominal pore sizes for sintered element: 0.5, 2, 7, 15, 40, 60 and 80 µm
- Nominal pore sizes for strainer element: 100, 150, 250 and 450 µm
- Maximum working pressure: 3000 psig (207 bar)
- Working temperature: -20°F to 900°F (-28°C to 482°C)
- Body materials: 316 SS, 316L SS, 304 SS, 304L SS, 321 SS, 904L SS, and Brass
- Variety of end connections available

### All-welded In-line Filters

#### FW Series


- Large filtration area and high flow coefficient
- All-welded construction for elimination of leakage
- Easy cleaning of filters by backflushing
- Full-penetration weld between body and element
- Nominal pore sizes for sintered element: 0.5, 2, 7, 15, 40, 60 and 80 µm
- Maximum working pressure: 6000 psig (414 bar)
- Working temperature: -20°F to 900°F (-28°C to 482°C)
- Body materials: 316 SS, 316L SS, 304 SS, 304L SS, and 904L SS
- Variety of end connections available

## Pressure vs. Temperature

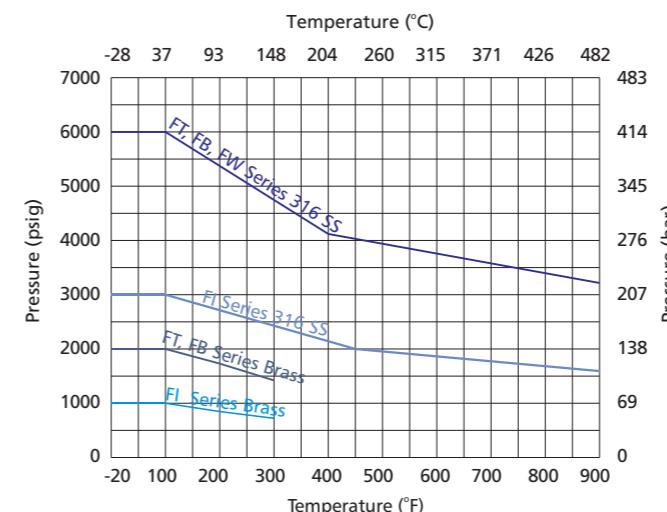


Contact the authorized representative of FITOK Group for curve graph of other materials.


FT Series




FB Series



FI Series



FW Series



## Standard Materials of Construction

Component	Material Grade/ASTM Specification	
	316 SS	Brass
1 Body	316 SS/A182	Brass C36000/B16
2 Element	Sintered 316 SS or strainer 316 SS	Sintered 316 SS or strainer 316 SS
3 Gasket	PTFE/D1710 or silver-plated 316 SS/A479	PTFE/D1710 or aluminum/B209
4 Spring	302 SS/A313	302 SS/A313
5 Bonnet Nut	316 SS/A276	C36000/B16
6 Backup Ring	316 SS/A276	316 SS/A276
7 Bonnet	316 SS/A479	C36000/B16

1. FW Series filters not available in brass

2. Lubricants: molybdenum disulfide-based and silicone-based

## Maximum Differential Pressure of Clean Filter at 70°F (20°C)

Series	Maximum Differential Pressure psig (bar)										
	0.5 micron	2 micron	7 micron	15 micron	40 micron	60 micron	80 micron	100 micron	150 micron	250 micron	450 micron
FT, FB, FI	2250 (155.2)	2250 (155.2)	1950 (134.5)	1750 (120.3)	1150 (79.3)	1150 (79.3)	1000 (68.9)	1000 (68.9)	1000 (68.9)	1000 (68.9)	1000 (68.9)
FW	600 (41.4)	100 (6.9)	100 (6.9)	100 (6.9)	—	—	—	—	—	—	—

## Elements

Nominal Pore Size $\mu\text{m}$	Pore Size Range $\mu\text{m}$	Element Type
0.5	0.5 to 2	Sintered
2	1 to 4	
7	5 to 10	
15	11 to 25	
40	35 to 53	
60	50 to 75	
80	70 to 95	
100	—	
150	—	
250	—	
450	—	
Strainer		

## Filtration Area

Series	Orifice in. (mm)	Filtration Area in. <sup>2</sup> (mm <sup>2</sup> )	
		Sintered	Strainer
2FT, 2FB	0.094 (2.04)	1.30 (830)	1.00 (640)
4FT, 4FB	0.172 (4.36)	1.30 (830)	1.00 (640)
6FT, 6FB	0.213 (5.41)	2.00 (1280)	1.70 (1090)
8FT, 8FB	0.250 (6.35)	2.00 (1280)	1.70 (1090)
2FI	0.094 (2.39)	0.55 (350)	—
4FI	0.187 (4.75)	1.30 (830)	1.00 (640)
6FI	0.281 (7.14)	2.00 (1280)	1.70 (1090)
8FI	0.406 (10.30)	2.00 (1280)	1.70 (1090)
4FW	0.187 (4.75)	0.44 (283)	—

## Flow Data at 70°F (20°C)

### FT, FB Series

Pressure Drop to Atmosphere $\Delta p$ psig (bar)	2FT and 2FB Series		4FT and 4FB Series		6FT, 6FB and 8FT, 8FB Series	
	Water Flow, U.S. gal (L/min)	Air Flow, std ft <sup>3</sup> /min (std L/min)	Water Flow, U.S. gal (L/min)	Air Flow, std ft <sup>3</sup> /min (std L/min)	Water Flow, U.S. gal (L/min)	Air Flow, std ft <sup>3</sup> /min (std L/min)
<b>0.5 Micron Cv = 0.035</b>						
5 (0.34)	0.07 (0.26)	0.40 (11.3)	0.07 (0.26)	0.40 (11.3)	0.11 (0.43)	0.47 (13.3)
10 (0.69)	0.11 (0.42)	0.50 (14.2)	0.11 (0.42)	0.50 (14.2)	0.16 (0.62)	0.74 (21.0)
50 (3.45)	0.25 (0.95)	1.33 (37.7)	0.25 (0.95)	1.33 (37.7)	0.36 (1.38)	1.96 (55.5)
<b>2 Micron Cv = 0.068</b>						
5 (0.34)	0.15 (0.56)	0.77 (21.8)	0.16 (0.60)	0.82 (23.2)	0.21 (0.81)	1.09 (30.9)
10 (0.69)	0.22 (0.83)	0.97 (27.5)	0.22 (0.83)	1.02 (28.9)	0.30 (1.14)	1.37 (38.8)
50 (3.45)	0.48 (1.81)	2.58 (73.1)	0.51 (1.93)	2.72 (77.0)	0.67 (2.53)	3.64 (103.1)
<b>7 Micron Cv = 0.158</b>						
5 (0.34)	0.35 (1.32)	1.80 (51.0)	0.37 (1.40)	1.88 (53.2)	0.78 (2.96)	4.00 (113.3)
10 (0.69)	0.50 (1.89)	2.25 (63.7)	0.52 (1.96)	2.35 (66.5)	1.10 (4.18)	5.00 (141.6)
50 (3.45)	1.12 (4.22)	5.98 (169.3)	1.16 (4.38)	6.25 (177.0)	2.47 (9.35)	13.30 (376.6)
<b>15 Micron Cv = 0.19</b>						
5 (0.34)	0.42 (1.61)	2.16 (61.2)	0.44 (1.66)	2.28 (64.6)	0.82 (3.12)	4.20 (118.9)
10 (0.69)	0.60 (2.27)	2.71 (76.7)	0.63 (2.38)	2.85 (80.7)	0.82 (3.12)	5.28 (149.5)
50 (3.45)	1.34 (5.06)	7.20 (203.9)	1.41 (5.33)	7.58 (214.6)	2.61 (9.88)	14.00 (396.4)
<b>40 Micron Cv = 0.23</b>						
5 (0.34)	0.51 (1.94)	2.62 (74.2)	0.54 (2.04)	2.74 (77.6)	0.93 (3.54)	4.80 (135.9)
10 (0.69)	0.73 (2.76)	3.28 (96.8)	0.76 (2.87)	3.42 (96.8)	1.32 (5.02)	6.00 (169.9)
50 (3.45)	1.63 (6.16)	8.74 (247.5)	1.70 (6.42)	9.11 (258.0)	2.96 (11.20)	15.90 (450.2)
<b>60 Micron Cv = 0.24</b>						
5 (0.34)	0.54 (2.04)	2.74 (77.6)	0.56 (2.11)	2.85 (80.7)	1.00 (3.78)	5.10 (144.4)
10 (0.69)	0.76 (2.87)	3.42 (96.8)	0.79 (2.98)	3.57 (101.1)	1.42 (5.37)	6.40 (181.2)
50 (3.45)	1.70 (6.42)	9.11 (258.0)	1.77 (6.70)	9.49 (268.7)	3.18 (12.00)	17.00 (481.4)
<b>80 Micron Cv = 0.25</b>						
5 (0.34)	0.56 (2.11)	2.85 (80.7)	0.58 (2.19)	2.96 (83.8)	1.49 (5.66)	7.64 (216.3)
10 (0.69)	0.79 (2.98)	3.57 (101.1)	0.82 (3.10)	3.70 (104.8)	2.11 (5.89)	9.55 (270.4)
50 (3.45)	1.77 (6.70)	9.49 (268.7)	1.84 (6.95)	9.80 (277.5)	4.73 (17.90)	25.40 (719.2)
<b>100 Micron Cv = 0.27</b>						
5 (0.34)	0.60 (2.27)	3.08 (87.2)	0.62 (2.34)	3.20 (90.6)	1.61 (6.08)	8.20 (232.2)
10 (0.69)	0.85 (3.21)	3.85 (109.0)	0.88 (3.30)	4.00 (113.2)	2.27 (8.61)	10.20 (288.8)
50 (3.45)	1.91 (7.22)	10.20 (288.8)	1.98 (7.48)	5.30 (150.1)	5.09 (19.20)	27.20 (770.2)
<b>150, 250, 450 Micron Cv = 0.55</b>						
<b>150, 250, 450 Micron Cv = 0.58</b>						
<b>150, 250, 450 Micron Cv = 0.82</b>						
5 (0.34)	1.23 (4.65)	6.28 (177.8)	1.30 (4.91)	6.60 (186.9)	1.83 (6.93)	9.36 (265.0)
10 (0.69)	1.74 (6.58)	7.85 (222.3)	1.83 (6.91)	8.20 (232.2)	2.59 (9.80)	11.70 (331.3)
50 (3.45)	3.89 (14.70)	20.80 (589.0)	4.10 (15.50)	21.90 (620.1)	5.79 (21.90)	27.20 (770.2)

## FI Series



Pressure Drop to Atmosphere $\Delta p$ psig (bar)	2FI Series		4FI Series		6FI, 8FI Series	
	Water Flow, U.S. gal (L/min)	Air Flow, std ft <sup>3</sup> /min (std L/min)	Water Flow, U.S. gal (L/min)	Air Flow, std ft <sup>3</sup> /min (std L/min)	Water Flow, U.S. gal (L/min)	Air Flow, std ft <sup>3</sup> /min (std L/min)
<b>0.5 Micron Cv = 0.008</b>						
5 (0.34)	0.01 (0.03)	0.09 (2.6)	0.08 (0.30)	0.42 (11.9)	0.41 (1.54)	2.09 (59.2)
10 (0.69)	0.02 (0.07)	0.11 (3.1)	0.12 (0.45)	0.52 (14.7)	0.59 (2.23)	2.56 (72.5)
50 (3.45)	0.05 (0.18)	0.30 (8.5)	0.26 (0.98)	1.42 (40.2)	1.32 (4.98)	6.99 (197.9)
<b>2 Micron Cv = 0.022</b>						
5 (0.34)	0.04 (0.15)	0.24 (6.8)	0.23 (0.86)	1.18 (33.4)	0.83 (3.13)	4.20 (118.9)
10 (0.69)	0.06 (0.22)	0.30 (8.5)	0.42 (1.58)	1.45 (41.1)	1.18 (4.46)	5.13 (145.3)
50 (3.45)	0.15 (0.56)	0.82 (23.2)	0.74 (2.79)	3.96 (112.1)	2.64 (9.97)	14.00 (396.4)
<b>7 Micron Cv = 0.028</b>						

## FW Series

Pressure Drop to Atmosphere $\Delta p$ psig (bar)	4FW Series	
	Water Flow, U.S. gal (L/min)	Air Flow, std ft <sup>3</sup> /min (std L/min)
0.5 Micron Cv = 0.008		
5 (0.34)	0.01 (0.03)	0.09 (2.6)
10 (0.69)	0.02 (0.07)	0.11 (3.1)
50 (3.45)	0.05 (0.18)	0.30 (8.5)
2 Micron Cv = 0.42		
5 (0.34)	0.93 (3.50)	4.72 (133.7)
10 (0.69)	1.32 (4.98)	5.77 (163.4)
50 (3.45)	2.96 (11.10)	15.70 (444.6)
7 Micron Cv = 0.45		
5 (0.34)	1.00 (3.78)	5.04 (142.7)
10 (0.69)	1.42 (5.36)	6.16 (174.4)
50 (3.45)	3.18 (12.00)	16.80 (475.7)
15 Micron Cv = 0.76		
5 (0.34)	1.69 (6.22)	8.55 (242.1)
10 (0.69)	2.40 (9.07)	10.40 (294.5)
50 (3.45)	5.37 (20.30)	28.50 (807.0)

## Dimensions



## FT Series

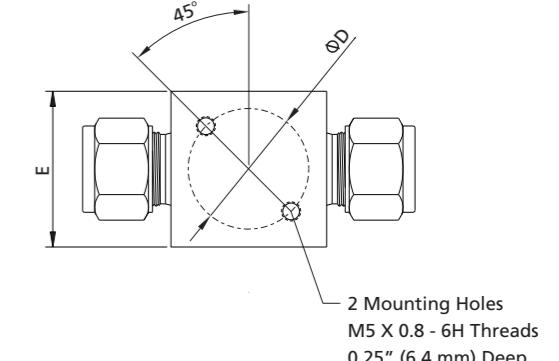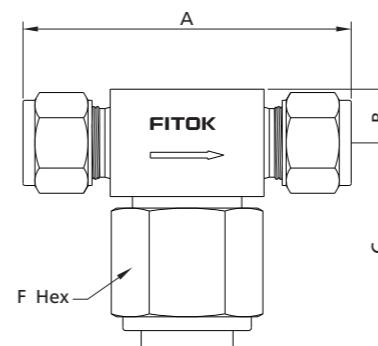

Basic Ordering Number	Connection Type and Size		Element Series	Filter Series	Dimension, in. (mm)					
	Inlet	Outlet			A	B	C	ΦD	E	F
FT□□-FL2-	1/8" FITOK	1/8" FITOK	2	2FT	2.27 (57.7)	0.38 (9.7)	1.49 (37.8)	1.00 (25.4)	1.00 (25.4)	1 (25.4)
FT□□-FL4-	1/4" FITOK	1/4" FITOK	4	4FT	2.47 (62.7)					
FT□□-FL6-	3/8" FITOK	3/8" FITOK	6	6FT	2.84 (72.1)	0.46 (11.7)	1.74 (44.2)	1.13 (28.7)	1.13 (28.7)	1 1/8 (28.6)
FT□□-FL8-	1/2" FITOK	1/2" FITOK	8	8FT	3.04 (77.2)					
FT□□-ML6-	6 mm FITOK	6 mm FITOK	4	4FT	2.46 (62.5)	0.38 (9.7)	1.49 (37.8)	1.00 (25.4)	1.00 (25.4)	1 (25.4)
FT□□-ML8-	8 mm FITOK	8 mm FITOK	6	6FT	2.84 (72.1)					
FT□□-ML10-	10 mm FITOK	10 mm FITOK	8	8FT	2.86 (72.6)	0.46 (11.7)	1.74 (44.2)	1.13 (28.7)	1.13 (28.7)	1 1/8 (28.6)
FT□□-ML12-	12 mm FITOK	12 mm FITOK	8	8FT	3.04 (77.2)					
FT□□-TS4-	1/4" TS	1/4" TS	4	4FT						
FT□□-TS6-	3/8" TS	3/8" TS	4	4FT	1.68 (42.7)					
FT□□-TB4-	1/4" TB	1/4" TB	4	4FT						
FT□□-TB6-	3/8" TB	3/8" TB	4	4FT						
FT□□-FNS2-	1/8 Female NPT	1/8 Female NPT	2	2FT	2.00 (50.8)					
FT□□-FNS4-	1/4 Female NPT	1/4 Female NPT	4	4FT	2.13 (54.1)					
FT□□-NS4-	1/4 Male NPT	1/4 Male NPT	4	4FT						
FT□□-NS6-	3/8 Male NPT	3/8 Male NPT	6	6FT	2.38 (60.5)	0.46 (11.7)	1.74 (44.2)	1.13 (28.7)	1.13 (28.7)	1 1/8 (28.6)
FT□□-NS8-	1/2 Male NPT	1/2 Male NPT	8	8FT	2.75 (69.9)					
FT□□-FR4-	1/4 Male FR	1/4 Male FR	4	4FT	2.30 (58.4)	0.38 (9.7)	1.49 (37.8)	1.00 (25.4)	1.00 (25.4)	1 (25.4)
FT□□-FR8-	1/2 Male FR	1/2 Male FR	8	8FT	2.55 (64.8)	0.46 (11.7)	1.74 (44.2)	1.13 (28.7)	1.13 (28.7)	1 1/8 (28.6)

Mounting holes not available with 1/4 female NPT end connections


## FB Series

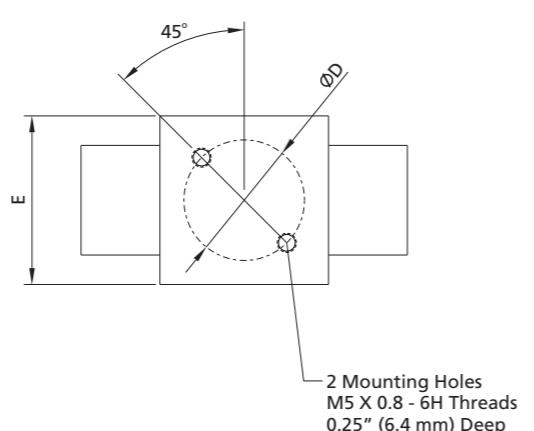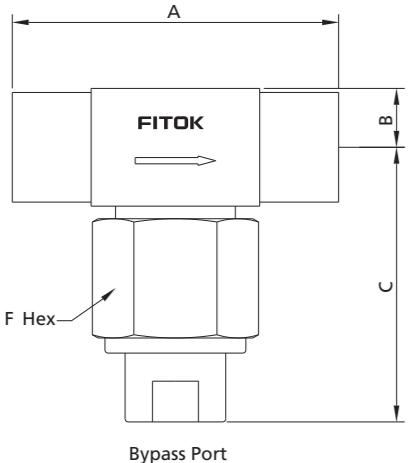

Basic Ordering Number	Connection Type and Size		Element Series	Filter Series	Dimension, in. (mm)					
	Inlet	Outlet			A	B	C	ØD	E	F
FB□□-FL2-	1/8" FITOK	1/8" FITOK	2	2FB	2.27 (57.7)	0.38 (9.7)	1.98 (50.2)	1.00 (25.4)	1.00 (25.4)	1 (25.4)
FB□□-FL4-	1/4" FITOK	1/4" FITOK	4	4FB	2.47 (62.7)		2.44 (61.9)			
FB□□-FL6-	3/8" FITOK	3/8" FITOK	6	6FB	2.84 (72.1)	0.46 (11.7)	2.74 (69.1)	1.13 (28.7)	1.13 (28.7)	1 1/8 (28.6)
FB□□-FL8-	1/2" FITOK	1/2" FITOK	8	8FB	3.04 (77.2)		2.96 (74.2)			
FB□□-ML6-	6 mm FITOK	6 mm FITOK	4	4FB	2.46 (62.5)	0.38 (9.7)	2.44 (61.9)	1.00 (25.4)	1.00 (25.4)	1 (25.4)
FB□□-ML8-	8 mm FITOK	8 mm FITOK	6	6FB	2.84 (72.1)		2.74 (69.1)			
FB□□-ML10-	10 mm FITOK	10 mm FITOK	8	8FB	2.86 (72.6)	0.46 (11.7)	1.13 (28.7)	1.13 (28.7)	1 1/8 (28.6)	
FB□□-ML12-	12 mm FITOK	12 mm FITOK	8	8FB	3.04 (77.2)		2.96 (74.2)			
FB□□-TS4-	1/4" TS	1/4" TS	4	4FB						
FB□□-TS6-	3/8" TS	3/8" TS	4	4FB						
FB□□-TB4-	1/4" TB	1/4" TB	4	4FB						
FB□□-TB6-	3/8" TB	3/8" TB	4	4FB						
FB□□-FNS2-	1/8 Female NPT	1/8 Female NPT	2	2FB	2.00 (50.8)					
FB□□-FNS4-	1/4 Female NPT	1/4 Female NPT	4	4FB	2.13 (54.1)					
FB□□-NS4-	1/4 Male NPT	1/4 Male NPT	4	4FB						
FB□□-NS6-	3/8 Male NPT	3/8 Male NPT	6	6FB	2.38 (60.5)	0.46 (11.7)	2.00 (50.8)	1.13 (28.7)	1.13 (28.7)	1 1/8 (28.6)
FB□□-NS8-	1/2 Male NPT	1/2 Male NPT	8	8FB	2.75 (69.9)					
FB□□-FR4-	1/4 Male FR	1/4 Male FR	4	4FB	2.38 (60.5)	0.38 (9.7)	2.44 (61.9)	1.00 (25.4)	1.00 (25.4)	1 (25.4)
FB□□-FR8-	1/2 Male FR	1/2 Male FR	8	8FB	2.75 (69.9)	0.46 (11.7)	2.96 (74.2)	1.13 (28.7)	1.13 (28.7)	1 1/8 (28.6)


Mounting holes not available with 1/4 female NPT end connections

## FI Series

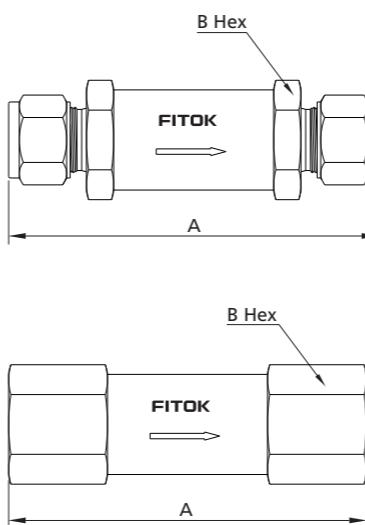

Basic Ordering Number	Connection Type and Size		Element Series	Filter Series	Dimension in. (mm)	
	Inlet	Outlet			A	F
FI□□-FL2-	1/8" FITOK	1/8" FITOK	2	2FI	2.35 (59.7)	9/16 (14.3)
FI□□-FL4-	1/4" FITOK	1/4" FITOK	4	4FI	2.95 (74.9)	3/4 (19.1)
FI□□-FL6-	3/8" FITOK	3/8" FITOK	6	6FI	3.21 (81.5)	1 (25.4)
FI□□-FL8-	1/2" FITOK	1/2" FITOK	8	8FI	3.49 (88.6)	
FI□□-ML3-	3 mm FITOK	3 mm FITOK	2	2FI	2.38 (60.5)	9/16 (14.3)
FI□□-ML6-	6 mm FITOK	6 mm FITOK	4	4FI	2.96 (75.2)	3/4 (19.1)
FI□□-FNS2-	1/8 Female NPT	1/8 Female NPT	2	2FI	2.16 (54.9)	9/16 (14.3)
FI□□-FNS4-	1/4 Female NPT	1/4 Female NPT	4	4FI	2.87 (72.9)	3/4 (19.1)
FI□□-NS2-	1/8 Male NPT	1/8 Male NPT	2	2FI	1.88 (47.7)	9/16 (14.3)
FI□□-NS4-	1/4 Male NPT	1/4 Male NPT	4	4FI	2.69 (68.3)	
FI□□-FR2-	1/8 Male FR	1/8 Male FR	2	2FI	2.79 (70.8)	3/4 (19.1)
FI□□-FR4-	1/4 Male FR	1/4 Male FR	4	4FI		
FI□□-FRT2-	1/8 Female BSPT	1/8 Female BSPT	2	2FI	2.16 (54.9)	9/16 (14.3)
FI□□-FRT4-	1/4 Female BSPT	1/4 Female BSPT	4	4FI	2.87 (72.9)	3/4 (19.1)
FI□□-RT2-	1/8 Male BSPT	1/8 Male BSPT	2	2FI	1.88 (47.7)	9/16 (14.3)
FI□□-RT4-	1/4 Male BSPT	1/4 Male BSPT	4	4FI	2.69 (68.3)	3/4 (19.1)


## FW Series



Basic Ordering Number	Connection Type and Size		Orifice in. (mm)	Dimension, in. (mm)	
	Inlet	Outlet		A	F
FW□□-FL4-	1/4" FITOK	1/4" FITOK	0.187(4.75)	2.15(54.6)	
FW□□-ML6-	6 mm FITOK	6 mm FITOK			
FW□□-FNS4-	1/4 Female NPT	1/4 Female NPT	0.453(11.5)	1.57(39.9)	
FW□□-NS4-	1/4 Male NPT	1/4 Male NPT	0.281(7.14)	1.89(48.0)	
FW□□-FR4-	1/4 Male FR	1/4 Male FR	0.187(4.75)	2.04(51.8)	

1. FITOK means FITOK double ferrule tube fittings, FR means metal gasket seal fittings, TS means fractional tube socket weld, TB means fractional tube butt weld.
2. Sizes and types listed are standard. Other sizes and types are available upon request.
3. Dimensions are shown with FITOK nuts finger-tightened. All dimensions are for reference only and are subject to change. For dimensions not shown above, please contact the authorized representative or FITOK Group.

## Filters Ordering Information

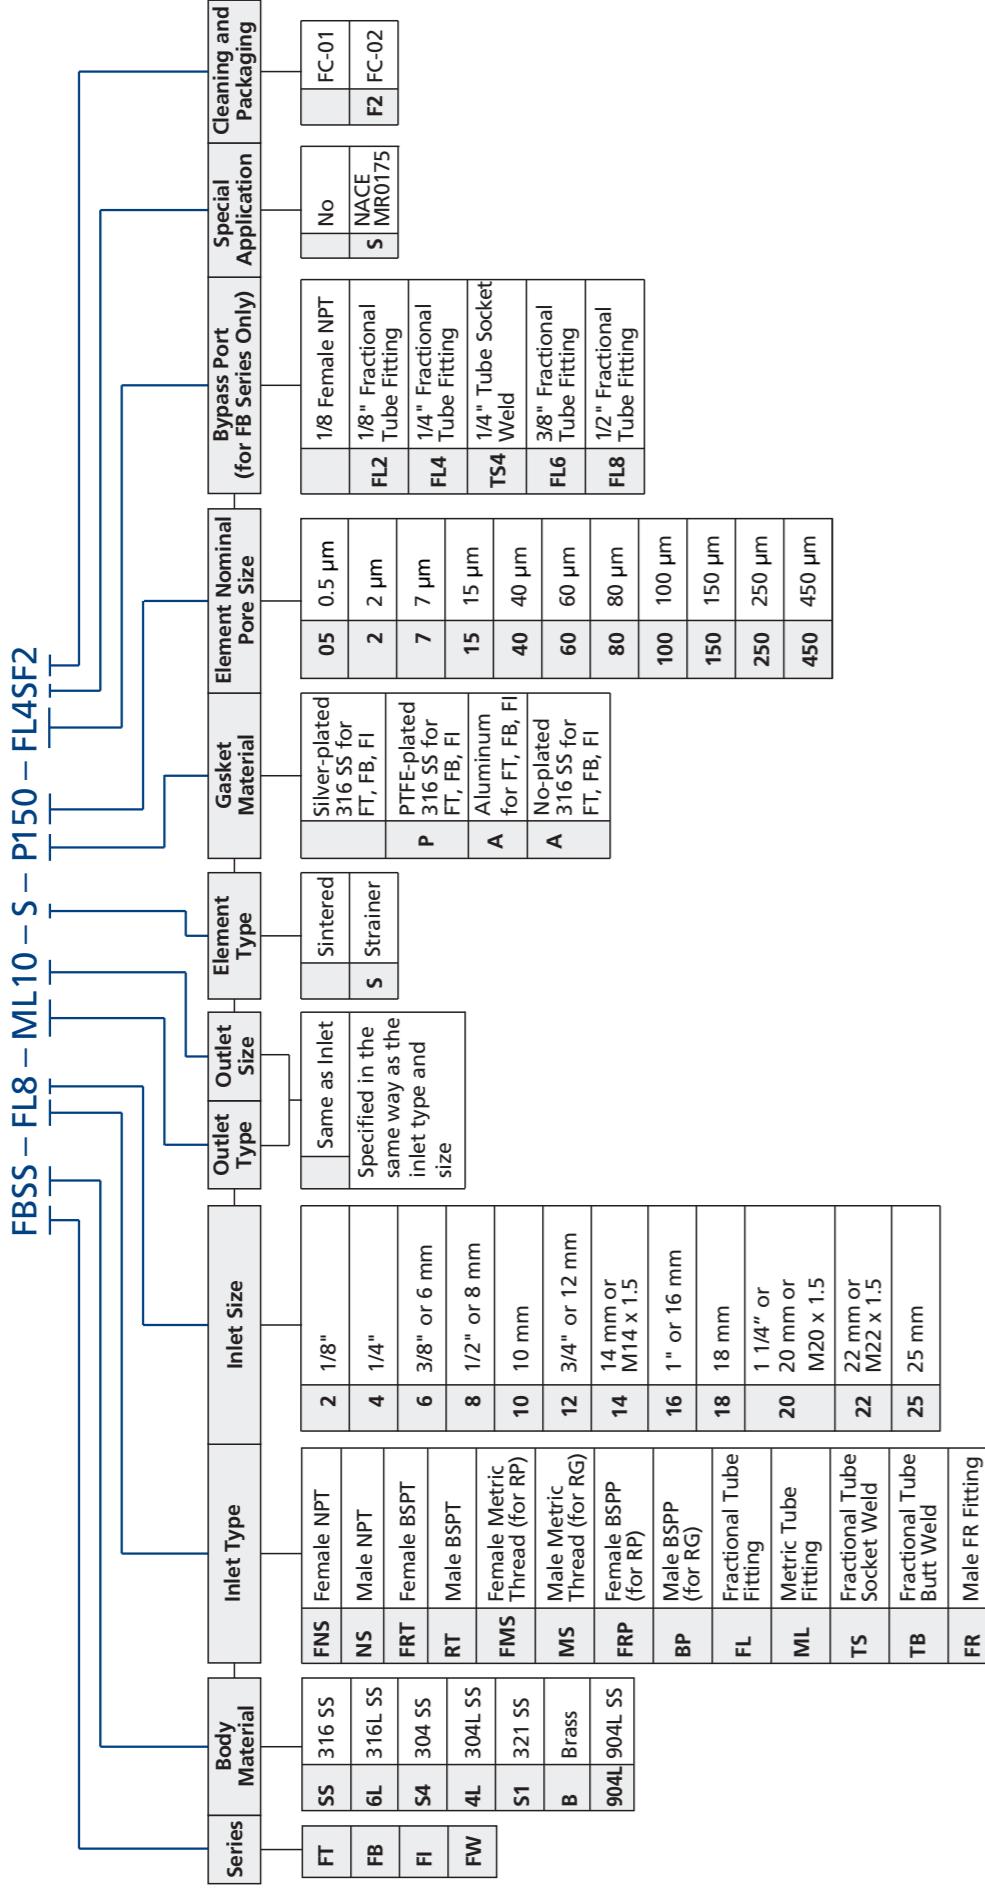

1. Standard thread pitch for metric threads are as follows:

M10 and below: 1 mm

M12 to M24: 1.5 mm

M27 and above: 2 mm

Standard thread pitch should be ignored in the ordering number, others should be specified.

2. Cleaning and Packaging:

FC-01 Standard cleaning and packaging for basic industrial procedures.

FC-02 Special cleaning and packaging for wetted system components to ensure compliance requirement as stated in ASTM G93 Level C.

## Elements Ordering Information

SSE - SN8 - 60		Material	Part Name	Element Type	Element Series	Element Nominal Pore Size
SS 316 SS	E Element	SN Sintered	ST Strainer	2 (only for sintered)	4	
		P PTFE-plated 316 SS for FT, FB, FI		7 7 μm	8	05 0.5 μm
		A Aluminum for FT, FB, FI		15 15 μm	100 100 μm	2 2 μm
		A No-plated 316 SS for FT, FB, FI		40 40 μm	150 150 μm	7 7 μm
				60 60 μm	250 250 μm	15 15 μm
				80 80 μm	450 450 μm	40 40 μm
				100 100 μm	60 60 μm	60 60 μm
				150 150 μm	80 80 μm	80 80 μm
				250 250 μm	100 100 μm	100 100 μm
				450 450 μm	150 150 μm	150 150 μm